


TRAYSEALING THOUGHT & DESIGN FOR YOU

by MECAPACK

TRAYSEALER O² 1500 WORKSTATION



TOOLING COMPATIBILITY

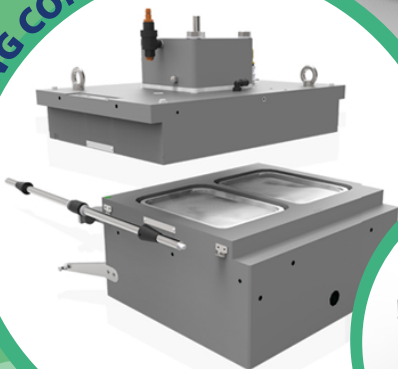

TO O² 2500



- + FIABILITY
- + COMPATIBILITY
- + ADAPTABILITY

O² 1500

The traysealer customizable to different configurations


With an easy manual tool change up to the tool stocker configuration (FLEX version)

HIGHLIGHT :

- Semi automatic or workstation traysealer
- Ergonomic and full cleanable design
- **FLEX version with integrated tool stocker (up to 3 tools)**
- STD version with quick tool change (10min)
- Tool compatibility with automatic traysealer O²2500
- Pneumatical sealing station with mechanical locking by rod



DIMENSION :

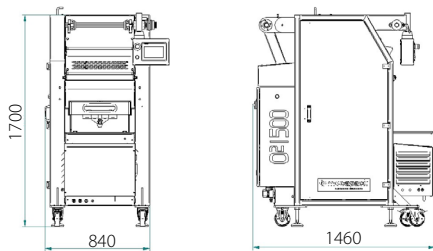

ENERGY :

Elec. : 3x400V+N+T – 8KW or 3x 220V+N+T – 9.2KW

Pneu : 15m³/h at 6 bars

Water : 100L/h (integrated cooling unit in option)

PROCESS :

Sealing | Vacuum and gas | Skin

SPEED :

Up to : 6 cpm

OPTION :

FLEX Machine configuration with integrated tool stocker | STD machine version with openable top tool | Automatic on station option with servodrived machine drawer | Integrated cooling unit | Spoted printed film | ...

INDICATIVE TRAY DIMENSION :

Pocket number	1	2	3	4
Lenght (mm)	420	325	325	325
Width (mm)	325	200	125	90
Hight (mm)	130	130	130	130

INDICATIVE TRAY DIMENSION :

Pocket number	2x1	2x2	2x3	2x4
Lenght (mm)	420	200	140	125
Width (mm)	140	140	125	90
Hight (mm)	130	130	130	130

SECTORS:



This document and its content have non-contractual values