


## Bolphane® BTT+ 125

### High Speed polyolefin shrink film

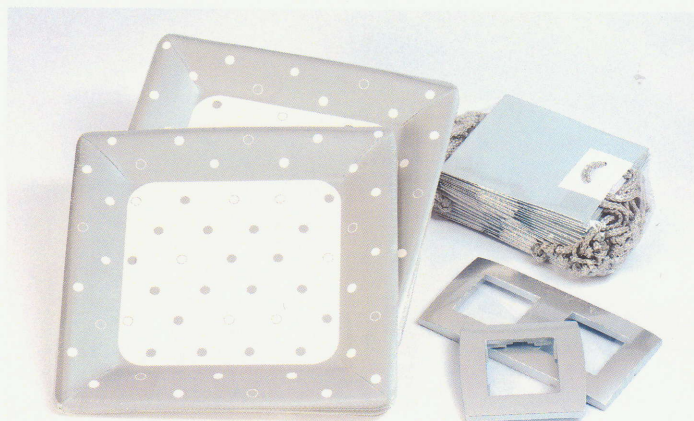

- Enhanced stiffness for high speed machine compatibility
- Instant sealing
- High shrink characteristics at low temperature
- Hot slip properties
- Excellent optics and appearance

Ideally suited for applications where high speed packaging equipment is running.

Exceptional shrink characteristics on irregular shaped items.

**Bolphane® BTT+ 125** can be successfully used in applications ranging from multimedia to publishing items as well as office supplies.

» Please contact us for any specific request.

#### TECHNICAL FEATURES

Grade	125		
Roll length (m)			
Singlewound	3 500		
Centerfolded	1 750		
Gloss at 20°	114		
Haze (%)	3		
	LD*	TD**	
Elongation at break (%)	100	110	
Tensile strength (kg/cm²)	1 150	1 100	
Shrinkage (%)	at 93°C	30	38
	at 120°C	66	67

\* LD: Longitudinal Direction – \*\* TD: Transverse Direction